

# Note on power propagation time and lower bounds for the power domination number

Daniela Ferrero<sup>1</sup> · Leslie Hogben<sup>2,3</sup>  · Franklin H. J. Kenter<sup>4</sup> · Michael Young<sup>2</sup>

© Springer Science+Business Media New York 2016

**Abstract** We present a counterexample to a lower bound for the power domination number given in Liao (J Comb Optim 31:725–742, 2016). We also define the power propagation time, using the power domination propagation ideas in Liao and the (zero forcing) propagation time in Hogben et al. (Discrete Appl Math 160:1994–2005, 2012).

**Keywords** Power domination · Power propagation time · Propagation time · Time constraint

**Mathematics Subject Classification** 05C69 · 05C12 · 05C15 · 05C57 · 94C15

---

✉ Leslie Hogben  
hogben@iastate.edu; hogben@aimath.org

Daniela Ferrero  
dferrero@txstate.edu

Franklin H. J. Kenter  
franklin.kenter@gmail.com

Michael Young  
myoung@iastate.edu

<sup>1</sup> Department of Mathematics, Texas State University, San Marcos, TX, USA

<sup>2</sup> Department of Mathematics, Iowa State University, Ames, IA 50011, USA

<sup>3</sup> American Institute of Mathematics, 600 E. Brokaw Road, San Jose, CA 95112, USA

<sup>4</sup> Department of Computational and Applied Mathematics, Rice University, Houston, TX 77005, USA

## 1 Introduction

To ensure reliability, electric power networks need to be monitored continuously. The most frequently used method of monitoring a network is to place phase measurement units (PMUs) at selected electrical nodes where transmission lines, loads, and generators are connected. A PMU placed at a node measures the voltage at the node and all current phasors at the node (Baldwin et al. 1993). Because of the cost of a PMU, the trivial solution of placing a PMU at every node is not practical, and it is important to minimize the number of PMUs used while maintaining the ability to observe the entire system.

This problem was first studied in terms of graphs by Haynes et al. (2002), where an electric power network is modeled by a graph with the vertices representing the electric nodes and the edges associated with the transmission lines joining two electrical nodes. Solving the power domination problem for a graph consists of finding a minimum set of vertices from which the entire graph can be observed according to rules that model PMU measurement capability; such a minimum set of vertices will provide the locations in the physical network where the PMUs should be placed in order to monitor the entire network at minimum cost.

Computation of the power domination number is a challenging problem. Given a graph  $G$  and a positive integer  $k$ , the problem of determining whether  $G$  admits a power dominating set of cardinality at most  $k$  has been proven to be NP-complete, even when restricted to bipartite graphs (Haynes et al. 2002), chordal graphs (Haynes et al. 2002), and planar graphs (Guo et al. 2008). On the other hand, Haynes et al. gave a linear time algorithm to solve the power domination problem in trees (Haynes et al. 2002) and Guo et al. (2008) presented a linear time algorithm for graphs of bounded tree-width.

Here we reproduce the definition of the power domination process and number from Liao (2016) using our notation. These simplified propagation rules were shown in Brueni and Heath (2005) to be equivalent to the original propagation rules in Haynes et al. (2002). The set of neighbors of a vertex  $v$  is denoted by  $N(v)$ , and  $N(S) = \bigcup_{v \in S} N(v)$ . For a set  $S$  of vertices in a graph  $G$ , define the following sets:

1.  $S^{[1]} = N[S] = S \cup N(S)$ .
2. For  $i \geq 1$ ,  $S^{[i+1]} = S^{[i]} \cup \{w : \exists v \in S^{[i]}, N(v) \cap (V(G) \setminus S^{[i]}) = \{w\}\}$ .

A set  $S \subseteq V(G)$  is a *power dominating set* of a graph  $G$  if there is a positive integer  $\ell$  such that  $S^{[\ell]} = V(G)$ . A *minimum power dominating set* is a power dominating set of minimum cardinality, and the *power domination number* of  $G$ , denoted by  $\gamma_P(G)$ , is the cardinality of a minimum power dominating set.

For a power dominating set  $S$ , the *power propagation time* of  $S$  in  $G$ , denoted here by  $\text{ppt}(G, S)$  and referred to as  $\ell$  in Aazami (2008) and Liao (2016), is the least integer  $\ell$  such that  $S^{[\ell]} = V(G)$ , or equivalently, the least  $\ell$  such that  $S^{[\ell+1]} = S^{[\ell]}$ . The *power propagation time* of  $G$  is

$$\text{ppt}(G) = \min\{\text{ppt}(G, S) \mid S \text{ is a minimum power dominating set of } G\}.$$

A related concept is the  $\ell$ -round power domination number, defined to be the minimum number of vertices needed to power-dominate  $G$  in power propagation time at most  $\ell$ . The  $\ell$ -round power domination number was introduced by Aazami (2008, 2010), where it was shown that its computation is an NP-hard problem even on planar graphs.

A lower bound on the power domination number using the propagation time of a particular power dominating set is presented in Liao (2016, Theorem 3); using our notation this bound is

$$|S| \geq \frac{|V|}{\text{ppt}(G, S) \cdot \Delta(G) + 1} \tag{1}$$

for any power dominating set  $S$  with power propagation time  $\text{ppt}(G, S)$ . To make this expression useful as a lower bound for  $\gamma_P(G)$ , an upper bound for  $\text{ppt}(G, S)$  must be found. It is incorrectly claimed in the proof of Liao (2016, Theorem 3) that  $\ell = \text{ppt}(G, S) \leq \text{diam}(G)$  for every power dominating set  $S$ , where  $\text{diam}(G)$  is the diameter of  $G$  (the maximum distance between any two vertices). Such a relationship between  $\ell = \text{ppt}(G, S)$  and  $\text{diam}(G)$  would yield the following incorrect lower bound for the power domination number

$$\frac{|V|}{\text{diam}(G) \cdot \Delta(G) + 1} \tag{2}$$

In Sect. 2, we construct an infinite family of graphs having power domination number equal to 2 and having the value in (2) arbitrarily large (see Example 2.2), thereby showing that (2) is not a lower bound for power domination number. We also establish a lower bound for the power domination number of a tree that is slightly better than the one in (2).

We remark that there are mathematical connections between the power domination number and the zero forcing number defined in AIM Minimum Rank – Special Graphs Work Group et al. (2008) and Burgarth and Giovannetti (2007) (called graph infection in the latter), and between the power propagation time discussed here and the propagation time defined in Hogben et al. (2012). We refer the reader to Benson et al. (2015) for a discussion of the relationship between the power domination number and the zero forcing number.

## 2 Lower bounds for the power domination number and properties of power propagation time

Unfortunately there is an error in Theorem 3 in Liao (2016), which states: *Given a connected graph  $G = (V, E)$  and a positive integer time constraint  $\ell$ , we can derive the lower bound of the minimum cardinality of a PDS in  $G$ .  $\gamma_P(G) \geq \frac{|V|}{\ell \cdot \Delta + 1} \geq \frac{|V|}{\text{diam}_G \cdot \Delta + 1}$ , where  $\Delta$  is the maximum degree of  $G$  and  $\text{diam}_G$  is the diameter of  $G$ .*

The first of these two inequalities is correct if  $\ell$  is the power propagation time of a minimum power dominating set. Using our power propagation time terminology, the proof of Liao (2016, Theorem 3) shows that

$$|S| \geq \frac{|V(G)|}{\text{ppt}(G, S) \cdot \Delta(G) + 1}.$$

By choosing a minimum power dominating set having minimum propagating time, we optimize this inequality (again restated in our notation):

**Theorem 2.1** (Liao 2016, Theorem 3) *For a connected graph  $G = (V, E)$ ,*

$$\gamma_P(G) \geq \frac{|V|}{\text{ppt}(G) \cdot \Delta(G) + 1}.$$

The error in the proof occurs in trying to compare the non-comparable parameters  $\text{ppt}(G)$  [or  $\text{ppt}(G, S)$ ] and  $\text{diam}(G)$ . The last sentence of the proof (on p. 15) reads: *Because  $\ell$  is not larger than the diameter of the given graph  $G$ , ...* Although true for trees as shown in Theorem 2.5 below, this statement is not correct for an arbitrary graph, and its use yields the incorrect lower bound  $\gamma_P(G) \geq \frac{|V(G)|}{\text{diam}(G) \cdot \Delta + 1}$ , given in Liao (2016, Theorem 3), to which we present a counterexample.


*Example 2.2* Given an integer  $\Delta \geq 3$ , construct the graph  $H_\Delta$  with three levels of vertices as follows:

1. The first vertex is numbered 1. This one vertex is on level 1.
2. Vertex 1 has  $\Delta$  neighbors, numbered 2, ...,  $\Delta + 1$ . These vertices are on level 2.
3. Each level 2 vertex has  $\Delta - 1$  neighbors on level 3. This adds  $\Delta(\Delta - 1) = \Delta^2 - \Delta$  vertices, numbered  $\Delta + 2, \dots, \Delta^2 + 1$ .
4. Add edges to make a path along level 3, so vertex  $i$  is adjacent to vertex  $i + 1$  for  $\Delta + 2 \leq i \leq \Delta^2$ .

Figure 1 shows the graph  $H_\Delta$  for  $\Delta = 9$  (the three levels are the three rows of vertices).

Then  $|V(H_\Delta)| = 1 + \Delta + \Delta(\Delta - 1) = 1 + \Delta^2$ ,  $\text{diam}(H_\Delta) = 4$ , and the maximum degree is  $\Delta(H_\Delta) = \Delta$ . The power domination number is  $\gamma_P(H_\Delta) = 2$ , because no one vertex power dominates  $H_\Delta$ , and vertices 1 and  $\Delta + 2$  are a power dominating set. But

$$\frac{|V(H_\Delta)|}{\Delta(H_\Delta) \text{diam}(H_\Delta) + 1} = \frac{\Delta^2 + 1}{4\Delta + 1} \approx \frac{\Delta}{4}.$$

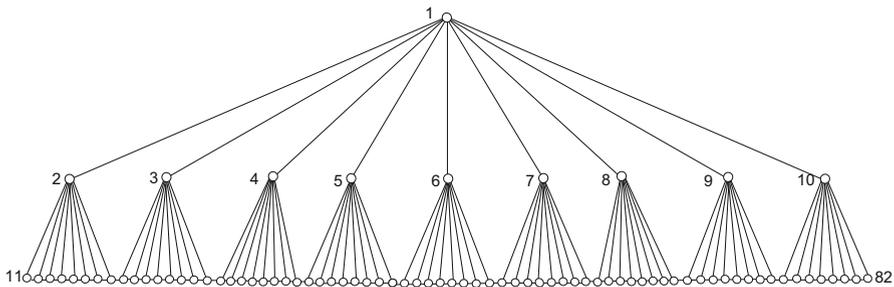

**Fig. 1** The graph  $H_\Delta$  for  $\Delta = 9$

By choosing  $\Delta$  sufficiently large,  $\frac{|V(H_\Delta)|}{\Delta(H_\Delta) \text{diam}(H_\Delta)+1}$  can be made arbitrarily large. In particular, for  $\Delta = 9$ ,

$$\frac{|V(H_\Delta)|}{\Delta(H_\Delta) \text{diam}(H_\Delta) + 1} = \frac{82}{37} > 2 = \gamma_P(H_\Delta).$$

While the relationship in Theorem 2.1 is correct,  $\frac{|V(G)|}{\text{ppt}(G) \cdot \Delta(G)+1}$  is not useful as a lower bound for  $\gamma_P(G)$ , because one must know  $\gamma_P(G)$  in order to compute  $\text{ppt}(G)$ . One can, however, use the relationship in Theorem 2.1 to obtain a lower bound on power propagation time, assuming one knows  $\gamma_P(G)$ :

**Corollary 2.3** For a graph  $G$ ,

$$\text{ppt}(G) \geq \left\lceil \frac{|V(G)| - \gamma_P(G)}{\gamma_P(G) \cdot \Delta(G)} \right\rceil.$$

Although in general it is not true that  $\text{ppt}(G) \leq \text{diam}(G)$ , we show below that  $\text{ppt}(T) \leq \text{diam}(T)$  when  $T$  is a tree, and in fact this can be strengthened slightly when  $T$  has at least three vertices (see Theorem 2.5). First we establish a relationship between the power propagation time and the maximum length of a trail. A walk  $v_0v_1 \cdots v_p$  in  $G$  is a subgraph with vertex set  $\{v_0, v_1, \dots, v_p\}$  and edge set  $\{v_0v_1, v_1v_2, \dots, v_{p-1}v_p\}$  (vertices and/or edges may be repeated in a walk but duplicates are removed from sets). A trail is a walk with no repeated edges (vertices may be repeated). Of course, a path is a trail with no repeated vertices. The length of a trail  $P = v_0v_1 \cdots v_p$  is  $p$ , i.e., the number of edges in  $P$ .

Given a power dominating set  $S$ , the power propagation process naturally labels a vertex by the time at which it is observed, that is,  $t(v) = i$  for  $v \in S^{[i]} \setminus S^{[i-1]}$  with  $i \geq 1$  and  $t(v) = 0$  for  $i \in S$ . We can extend this labeling to edges by  $t(uv) = \max\{t(u), t(v)\}$ . A trail  $P = v_0v_1 \cdots v_p$  is called *monotone* if  $p \geq 1$ ,  $t(v_{i-1}v_i) \leq t(v_i v_{i+1}) \leq t(v_{i-1}v_i) + 1$  for  $i = 1, \dots, p - 1$  and  $t(v_{p-1}v_p) = t(v_p)$ . Note that the term ‘monotone’ comes from the monotonicity of the edge labels.

**Lemma 2.4** Let  $G$  be a graph and let  $S$  be a power dominating set of  $G$  such that  $S$  has no vertices of degree 1. Then for every vertex  $v \in V(G) \setminus S$ , there is a monotone trail of length at least  $t(v) + 1$  in which  $v$  is the last vertex of the trail.

*Proof* Suppose  $t(v) = 1$ . Then there is a vertex  $u \in S \cap N(v)$ , and since  $S$  has no degree 1 vertices, there is another neighbor  $w$  of  $u$ . Since  $t(u) = 0$  and  $t(w) = 0$  or 1,  $P = wuv$  is the required trail. This proves the base case.

Assume the statement is true when  $1 \leq t(v) < i$ , and suppose that  $t(v) = i \geq 2$ . Let  $w \in V(G)$  be the vertex that forces  $v$  at time  $i$ . Assume first that  $t(w) = i - 1$ . Then there is a monotone trail  $P$  of length at least  $i$  that has  $w$  as its last vertex. Since  $t(wv) = i$ , we can adjoin the edge  $wv$  and vertex  $v$  to  $P$  to obtain a monotone trail of length at least  $i + 1$  with  $v$  as last vertex. Now assume that  $1 \leq t(w) < i - 1$ . Then there exists a vertex  $w' \in N(w)$  such that  $t(w') = i - 1$ . Therefore, there is a monotone trail  $P$  of length at least  $i$  that has  $w'$  as its last vertex. Since  $t(w'w) = i - 1$  and  $t(wv) = i$ , we can adjoin edge  $w'w$ , vertex  $w$ , edge  $wv$ , and vertex  $v$  to  $P$  to obtain a monotone trail  $P'$  of length at least  $i + 2$  that ends at  $v$ .  $\square$

**Theorem 2.5** For every tree  $T$  with at least 3 vertices,  $T$  has a minimum power dominating set  $S$  with  $\text{ppt}(T, S) = \text{ppt}(T)$  and  $\deg_T u \geq 2$  for all  $u \in S$ . Furthermore,  $\text{ppt}(T) \leq \text{diam}(T) - 1$ .

*Proof* Let  $S$  be a power dominating set of  $T$  such that  $\text{ppt}(T, S) = \text{ppt}(T)$ . Assume  $S$  contains a vertex  $v$  with degree 1. Let  $u$  be the vertex adjacent to  $v$  in  $T$ . The degree of  $u$  is at least 2, because  $T$  has at least 3 vertices. Since  $S$  is minimum,  $u \notin S$ . Therefore  $S' = S \setminus \{v\} \cup \{u\}$  is also a minimum power dominating set of  $T$ , and  $\text{ppt}(T, S') \leq \text{ppt}(T, S)$ . So  $T$  has a minimum power dominating set containing no vertices of degree 1 that has power propagation time of  $\text{ppt}(T)$ . By Lemma 2.4,  $T$  contains a monotone trail of length at least  $\text{ppt}(T) + 1$ , and every trail in a tree is a path. Therefore,  $T$  has a path of length at least  $\text{ppt}(T) + 1$ . So  $\text{ppt}(T) + 1 \leq \text{diam}(T)$ .  $\square$

**Corollary 2.6** For every tree  $T$  with at least 3 vertices,

$$\gamma_P(T) \geq \left\lceil \frac{|V(G)|}{(\text{diam}(G) - 1) \cdot \Delta(G) + 1} \right\rceil.$$

## References

- Aazami A (2010) Domination in graphs with bounded propagation: algorithms, formulations and hardness results. *J Comb Optim* 19:429–456
- Aazami A (2008) Hardness results and approximation algorithms for some problems on graphs. PhD Thesis, University of Waterloo. <http://hdl.handle.net/10012/4147>
- AIM Minimum Rank – Special Graphs Work Group, Barioli F, Barrett W, Butler S, Cioaba SM, Cvetković D, Fallat SM, Godsil C, Haemers W, Hogben L, Mikkelsen R, Narayan S, Pryporova O, Sciriha I, So W, Stevanović D, van der Holst H, Vander Meulen K, Wehe AW (2008) Zero forcing sets and the minimum rank of graphs. *Linear Algebra Appl* 428:1628–1648
- Baldwin TL, Mili L, Boisen MB Jr, Adapa R (1993) Power system observability with minimal phasor measurement placement. *IEEE Trans Power Syst* 8:707–715
- Benson KF, Ferrero D, Flagg M, Furst V, Hogben L, Vasilevska V, Wissman B Power domination and zero forcing. Under review. [arxiv:1510.02421](https://arxiv.org/abs/1510.02421)
- Brueni DJ, Heath LS (2005) The PMU placement problem. *SIAM J Discrete Math* 19:744–761
- Burgarth D, Giovannetti V (2007) Full control by locally induced relaxation. *Phys Rev Lett* 99:100501
- Guo J, Niedermeier R, Raible D (2008) Improved algorithms and complexity results for power domination in graphs. *Algorithmica* 52:177–202
- Haynes TW, Hedetniemi SM, Hedetniemi ST, Henning MA (2002) Domination in graphs applied to electric power networks. *SIAM J Discrete Math* 15:519–529
- Hogben L, Huynh M, Kingsley N, Meyer S, Walker S, Young M (2012) Propagation time for zero forcing on a graph. *Discrete Appl Math* 160:1994–2005
- Liao C-S (2016) Power domination with bounded time constraints. *J Comb Optim* 31:725–742